

# ALURAD®

Mükemmel Radyatör

## Bali




## BALI

Bali

**Genişlik** : Min. 350 mm, Max. 600 mm

**Yükseklik** : Max. 1800 mm

**Boşluk Sayısı** : isteğe göre...




TS EN 442/2 -  $\Delta t$  60°C (90/70-20°C)

Model	Tip numarası	Dilim Sayısı	Havlu için boşluk sayısı	Genişlik (mm)	Yükseklik (mm)	Eksenler arası ölçü (mm)	Isı gücü (Watt)	Isı gücü (Kcal/h)	m <sup>2</sup> / Adet	Ağırlık (kg / adet)
385/7-2	4/7	7	2	385	730	360	356	307	0.565	3.45
485/7-2	5/7	7	2	485	730	460	449	386	0.711	3.90
385/13-2	4/12	13	2	385	1210	360	509	438	0.935	6.04
485/13-2	5/12	13	2	485	1210	460	641	552	1.177	6.88
525/10-2	5/9	10	2	525	970	500	583	502	1.020	5.65
525/13-2	5/12	13	2	525	1210	500	694	598	1.274	7.22
525/16-3	5/15	16	3	525	1530	500	827	712	1.584	8.99
525/18-4	5/17	18	4	525	1770	500	921	793	1.782	10.23

### HAVLULUK BAĞLANTI

Alurad'ın Elit, Eris, Arkadia, Bali ve Zeus modellerinde uygulanabilir. Mutlaka alttan giriş ve çıkış yapmak gerekmektedir.

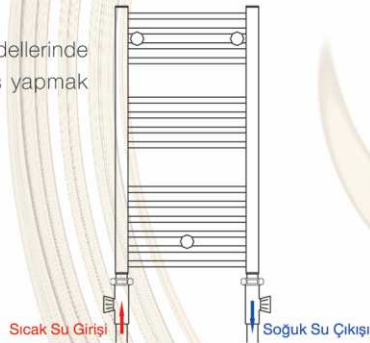

TABAN